


IWO-6100-P4

15" TFT LCD Panel PC

Specification

- € **Designed for mountable industrial Panel PC**
- € **Designed by steel made front panel meet NEMA4 or IP65 (optional)**
- € **Processor:** Socket 478 for Intel® Pentium® 4 (FSB 400/533 MHz) supports Hyper Threading Technology (3.0)
- € **Chipset:**
 - ò Intel 865G memory Cotroller Hub (MCH)
 - ò 82801EB (ICH5) chipset
- € **Micro-ATX size motherboard**
- € **One expansion slot available for 32bit PCI**
- € **15.0" TFT LCD Display:**
 - ò 1024x768 (XGA) resolutions
 - ò 200 cd/m² brightness
 - ò 50000 hours LCD MTBF
 - ò 25000 hours backlight MTBF
- € **System Memory:**
 - ò 2 x DIMM socket
 - ò Max capacity: Up to 2 GB
- € **Driver Bay:**
 - ò 1 x 2.5" internal IDE interface HDD
 - ò 1 x 5.25" slim CD-ROM
 - ò 1 x 3.5" slim FDD
- € **Graphic:**
 - ò Support AGP2.0 including 4x AGP data transfers
 - ò 8M Frame Buffer DVMT (Dynamic Video Memory Technology)
 - ò Intel GMCH Built-in Graphics supports up to 1280x1024x24 bit 85Hz
 - ò VGA DRIVER Support Windows 95/98 and Windows NT 4.0 and Windows 2000
- € **Audio:**
 - ò Software Audio Controller With On Board CODEC Complete to AC97'
 - ò Support 3D Surround

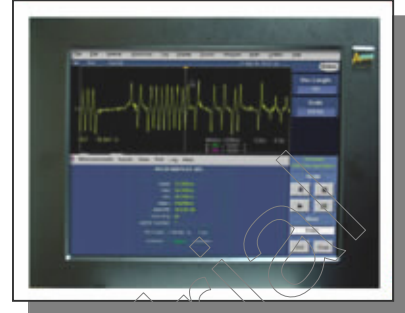

-
- € **Ethernet:** 10/100bps fast Ethernet controller
 - € **I/O:**
 - ò 2 x Serial
 - ò 1 x Parallel
 - ò 4 x USB
 - ò 1 x RJ-45 LAN Jack
 - ò PS/2 Keyboard/mouse connector
 - ò 1 X LINE IN / LINE OUT / Microphone Connector
 - € **Power Supply**
 - ò Output rating: 150W~200 W
 - ò Input voltage: 100~127/200~240VAC @ 47/63 Hz
 - ò Output voltage: +5 V @ 16 A, +12 V @ 5 A,+3.3V 7A,-5V 0.2A,-12V 0.3A,+5VSB 0.8A (3.3V & 5V combine load 83W)
 - ò MTBF: 100,000 hrs.
 - ò Safety: UL/ cUL/ CB/ TÜV/ Nemko/ FCC/ CE approved (PFC Optional)
 - € **Chassis Colors:** Black and beige color available, OEM color welcome
 - € **Environment Specification**
 - ò Operating Temperature: 0° ~ 50°C (32 ~ 113° F)
 - ò Relative Humidity: 5~85%
 - € **OEM Specification Welcome**
 - € **Option**
 - ò Resistive touch panel
 - ò 17" TFT LCD
 - € **Dimensions**
 - ò W.402mm x D.302mm x H.95mm (103mm including front panel)
 - ò N.W. 7.5 KGS, G.W. 9 KGS, CUFT. 1.5